

For safety reasons, this appliance is supplied without gas.

TORCH FILLING:



Only fill when the appliance is turned off and completely cooled down.

Always fill in a well-ventilated room.

1. Turn the ignition button all the way to the right to OFF.
The gas supply is now closed.
2. Turn the air supply ring with the hole facing up.
3. Hold the burner upside down. Insert the nozzle of the butane canister into the valve.
Press the nozzle well into the valve so you hear the gas flowing.
4. Place the torch on the kitchen counter and wait about 2 second before igniting the torch.

TORCH ON:



1. Turn the ignition button to the left, a hissing sound should be audible.
2. Turn the air supply ring towards the hole so you can see through it.
3. Push the ignition button to turn the torch on.
4. Use the air supply ring to regulate the intensity to the flame.
If the gas is not ignited straight away, increase the gas flow by turning the ignition button more to the left and pressing the button again.

Caution: the size of the flame can be longer than your eyes may see.

TORCH OFF:

Caution: mind the silver nozzle, it is now extremely hot!

1. Turn the ignition button all the way to the right to OFF.
The gas supply is now closed.
2. Turn the air supply ring with the hole facing up.
3. Always let the appliance cool down completely before you put it away.
Never leave the appliance unattended!

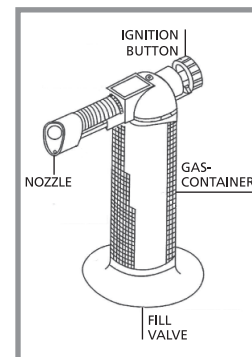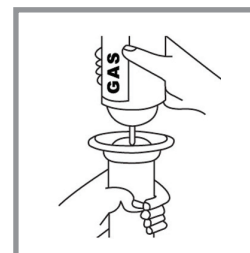

WARNING:

- Keep the appliance out of reach of children and animals.
- Never take the burner apart yourself or try to repair it.
- The size of the flame can be longer than your eyes can see and against some background even completely not visible.
- Never point the flame toward flammable object.
- The silver nozzle becomes extremely hot after ignition. DO NOT TOUCH!